



3 year guarantee Patented



ASAP

B71

(EN) Mobile fall arrester for rope
(FR) Antichute mobile sur corde
(DE) Mitlaufendes Auffanggerät für Seile
(IT) Anticaduta di tipo guidato su corda
(ES) Anticaídas deslizante para cuerda

CE 0082

EN 353-2:2002
EN 12841:2006 A

Individually tested

350 g

WARNING

Activities involving the use of this equipment are inherently dangerous. You are responsible for your own actions and decisions.

Before using this equipment, you must:

- Read and understand all Instructions for Use.
- Get specific training in its proper use.
- Become acquainted with its capabilities and limitations.
- Understand and accept the risks involved.



FAILURE TO HEED ANY OF THESE WARNINGS MAY RESULT IN SEVERE INJURY OR DEATH.

OK TRIACT LOCK M33 TL

CE 0082

EN 362: 2004 class B
EN 12275: 1998 type B

77 g

(EN) Double autolocking carabiner

(FR) Mousqueton à double verrouillage automatique

(DE) Karabiner mit automatischem Verriegelungssystem

(IT) Moschettone a doppio bloccaggio automatico

(ES) Mosquetón de bloqueo doble automático

24 kN **OK!**

8 kN

7 kN

19 mm



PETZL
ZI Cidex 105A
38920 Crolles
France
www.petzl.com/contact
ISO 9001
Copyright Petzl

Nomenclature of parts

1. ASAP
2. 3. 4. 5. 6. 7. 8. 9. 10. 11.

OK TRIACT LOCK

1. Installation

1A

Up
Haut
Oben
Alto
Arriba

UP

Down
Bas
Unten
Basso
Abajo

1 Kg

1B

OK TRIACT LOCK + ASAP SORBER 20
ASAP SORBER 40
ABSORBICA

OK!

1C. DANGER

1D. Fall arrest attachment points

EN361 A
EN361 A

CE 0082 EN 353-2

Parallel PETZL 10,5 mm
Axis PETZL 11 mm
Antipode BEAL 10,5 mm
Antipode / Industrie BEAL 11 mm
Rescue EDELWEISS 13 mm

www.petzl.com

10,5 ≤ Ø ≤ 13 mm
EN1891 A

EN 353-2

Requirement
Exigence
Anforderung
Requisiti
Exigencia

Minimum breaking strength of the rope with its termination

22 kN

CE 0082 EN 12841

Safety line
Working line

Type A rope adjustment devices

Ø 10 - 13 mm
EN 1891, type A ropes

2. Operational check


STOP

3. Unlocking

clac!

4. Removal

5. Clearance

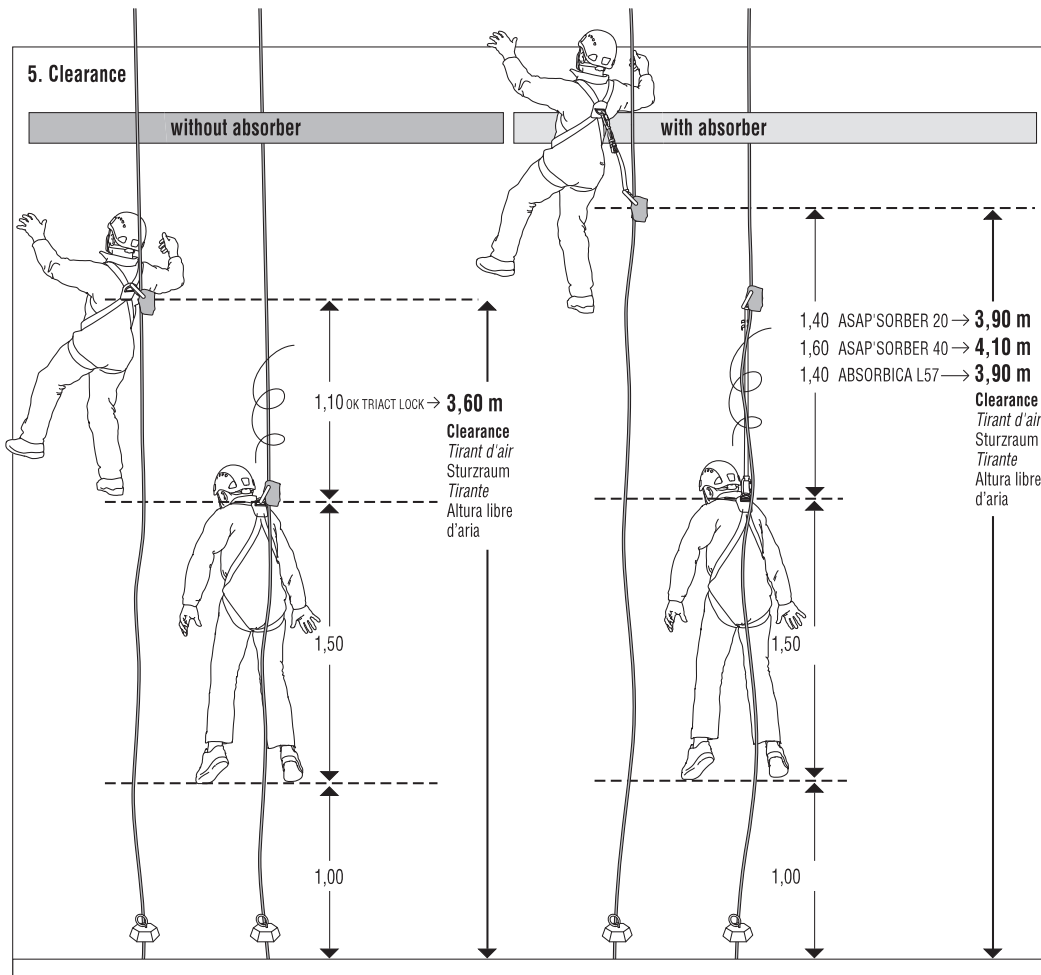

6. Obligations

